



BH200 1500VDC Fuse Holder



DESCRIPTION:

BH200 touch safe holders are designed for 14x51 mm cylindrical fuse links, especially for use with photovoltaic equipment.


SPECIFICATIONS:

- Rated Voltage: 1500 VDC
- Rated Current: 32A (TUV)
30A (UL)
- Rated Breaking Capacity: 10 kA
- Wire Range: 13-5 AWG(2-20mm²)
- Max.Torque: 3.4 N.m
- Maximum Heat Dissipation: 8 W
- Operation Temperature: -40°C to 150 °C
- Material Flammability: UL 94 V0
- Mounting: DIN Rail mounting
- Standards: UL 4248-19;EN 60947-3
- Approvals: UL(File: E486822)
TUV(File: R50393975)

FEATURES:

ADLER's BH200 touch safe fuse holders are designed for all standard 14x51 mm PV fuses, such as ADLER A74 / A84 series and other cylindrical fuse up to Ø14x51 mm, with current ratings up to 30 A or 32 A at 1500 VDC, it can effectively protect 1500 VDC circuits and equipment in photovoltaic applications.

Dimensions (mm)

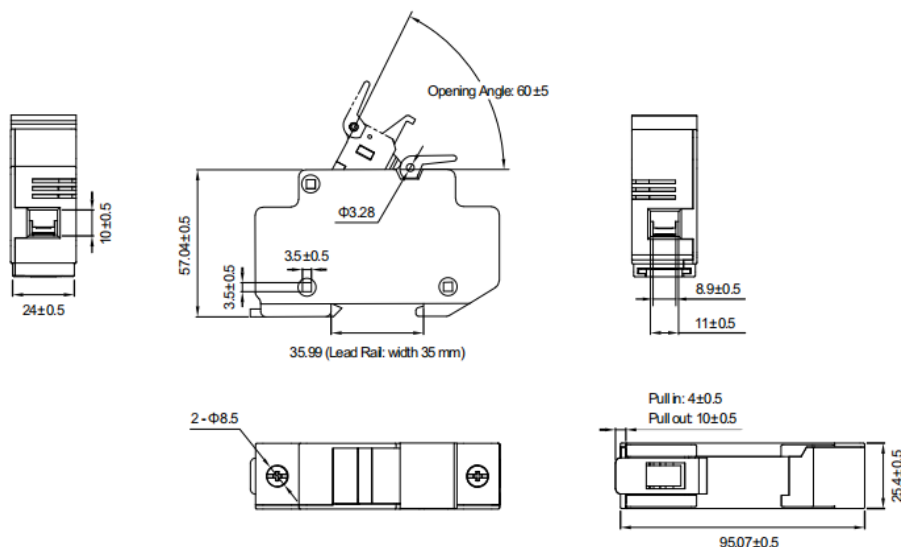

Web Resources

Download the latest technical documents: www.adlerelectric.com. Specifications are subject to change without notice.